



Environmentally Friendly Solutions for Aeration and Agitation

Becker blowers and compressors deliver 100% oil free air. Whether you're agitating a plating, cleaning or rinsing tank or aerating a pond, lagoon or fish farm, you'll have ZERO contamination from dirt and oil induced into your water or solution. These environmentally friendly pumps equate to less solution change out, clean water and lower overall operational costs. Becker also offers a "no noise" alternative with our new submersible blower.

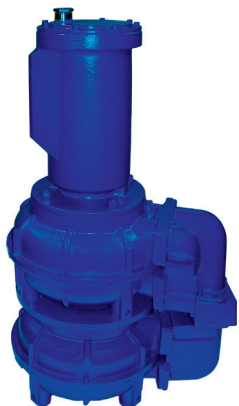

Submersible SV Series



SV Series

Pump Features


- Clean 100% oil free air
- Built in filters/silencers
- Continuous duty operation
- Low maintenance
- Environmentally friendly
- Quiet operation
- Reliable

Pump Applications

- Aquaculture
- Plating, cleaning and rinsing tanks
- Ponds and lagoons
- Dock freeze prevention
- Aeration depth up to 50 feet



KDT Series

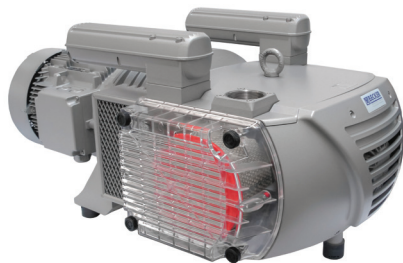


DTLF Series

Contact our staff today. We're ready to help. Call 888-633-1083 or email: info@beckerpumps.com.



Nationwide Sales and Service: USA, Canada, and Mexico 888-633-1083

Becker Pumps Corp. • 100 East Ascot Lane • Cuyahoga Falls, Ohio 44223
Tel 330-928-9966 • Fax 330-928-7065 • info@beckerpumps.com • www.beckerpumps.com

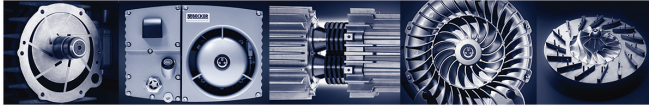

Specifications

DT Series

Model	CFM	Max. Pressure PSIG	HP
DT 4.10	7	15	0.6
DT 4.16	11	15	1.0
DT 4.25 K	18	15	1.7
DT 4.40 K	28	15	3.0

KDT Series

Model	CFM	Pressure Range PSIG	HP Range
KDT 3.60	37	7.25-22	4.0-4.8
KDT 3.80	45	7.25-22	4.0-6.4
KDT 3.100	69	7.25-22	6.4-8.9
KDT 3.140	90	7.25-22	8.9-12.1

DTLF Series

Model	CFM	Pressure Range PSIG	HP Range
DTLF 2.200	127	7.25-26	8.9-17.7
DTLF 2.250	172	7.25-26	12.1-24.1
DTLF 2.250 K	166	7.25-26	12.1-24.1
DTLF 2.400	270	13.0-26	18-40
DTLF 2.500	336	11.6-26	24-46

Submersible SV Series

Model	CFM	Max. Pressure " WG	HP
SV 220/1 UW	155	64	1.5
SV 220/2 UW	78	132	1.5
SV 300/1 UW	212	120	2.9
SV 300/2 UW	106	160	2.9
SV 320/2 UW	112	280	5.4

SV Series

Model	CFM	Max. Pressure " WG	HP
Single Stage			
SV 130/1	94	24	0.9
		44	1.2
		78	1.7
		95	2.0
		121	2.4
SV 201/1	135	48	1.7
		80	2.4
		133	3.6
SV 300/1	229	56	3.6
		92	4.8
		137	6.4
SV 400/1	276	72	4.8
		109	6.4
		165	8.9
SV 500/1	359	70	6.4
		111	8.9
		163	12.1
SV 700/1	529	60	8.9
		101	12.1
		161	17.7
SV 1100/1	735	44	12.1
		88	17.7
		141	24.1

Two Stage

SV 130/2	50	56	0.9
		92	1.2
		157	1.7
SV 201/2	64	92	1.7
		161	2.4
SV 300/2	111	181	4.8
SV 400/2	138	141	4.8
		201	6.4
SV 500/2	179	213	8.9
SV 700/2	258	189	12.1
SV 1100/2	359	165	17.7

Contact our staff today. We're ready to help. Call 888-633-1083 or email: info@beckerpumps.com.



Nationwide Sales and Service: USA, Canada, and Mexico 888-633-1083

Becker Pumps Corp. • 100 East Ascot Lane • Cuyahoga Falls, Ohio 44223
Tel 330-928-9966 • Fax 330-928-7065 • info@beckerpumps.com • www.beckerpumps.com