


DATA SHEET

VADS 1500+ SCREW VACUUM PUMPS


contact-free and oil-free compression, air-cooled and direct drive
with VARIAIR frequency inverter and VARIAIR Controller+

MAKE IT BECKER.

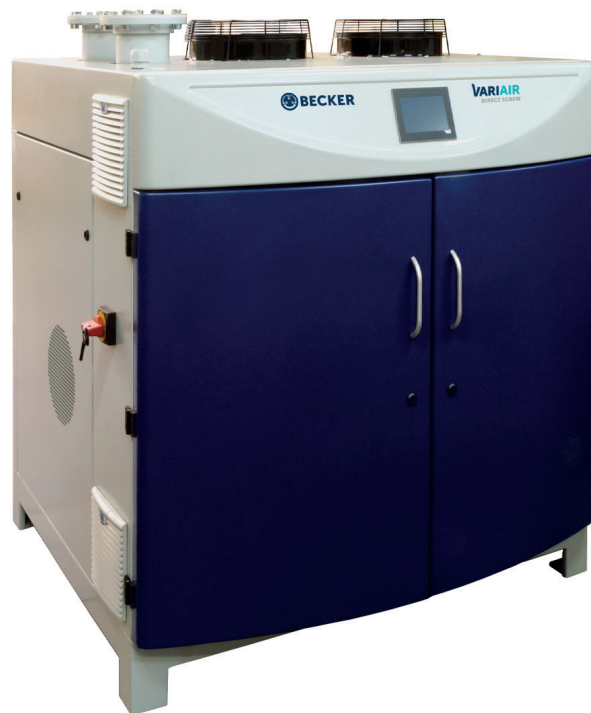



VARIAIR
DIRECT SCREW


 **BECKER**

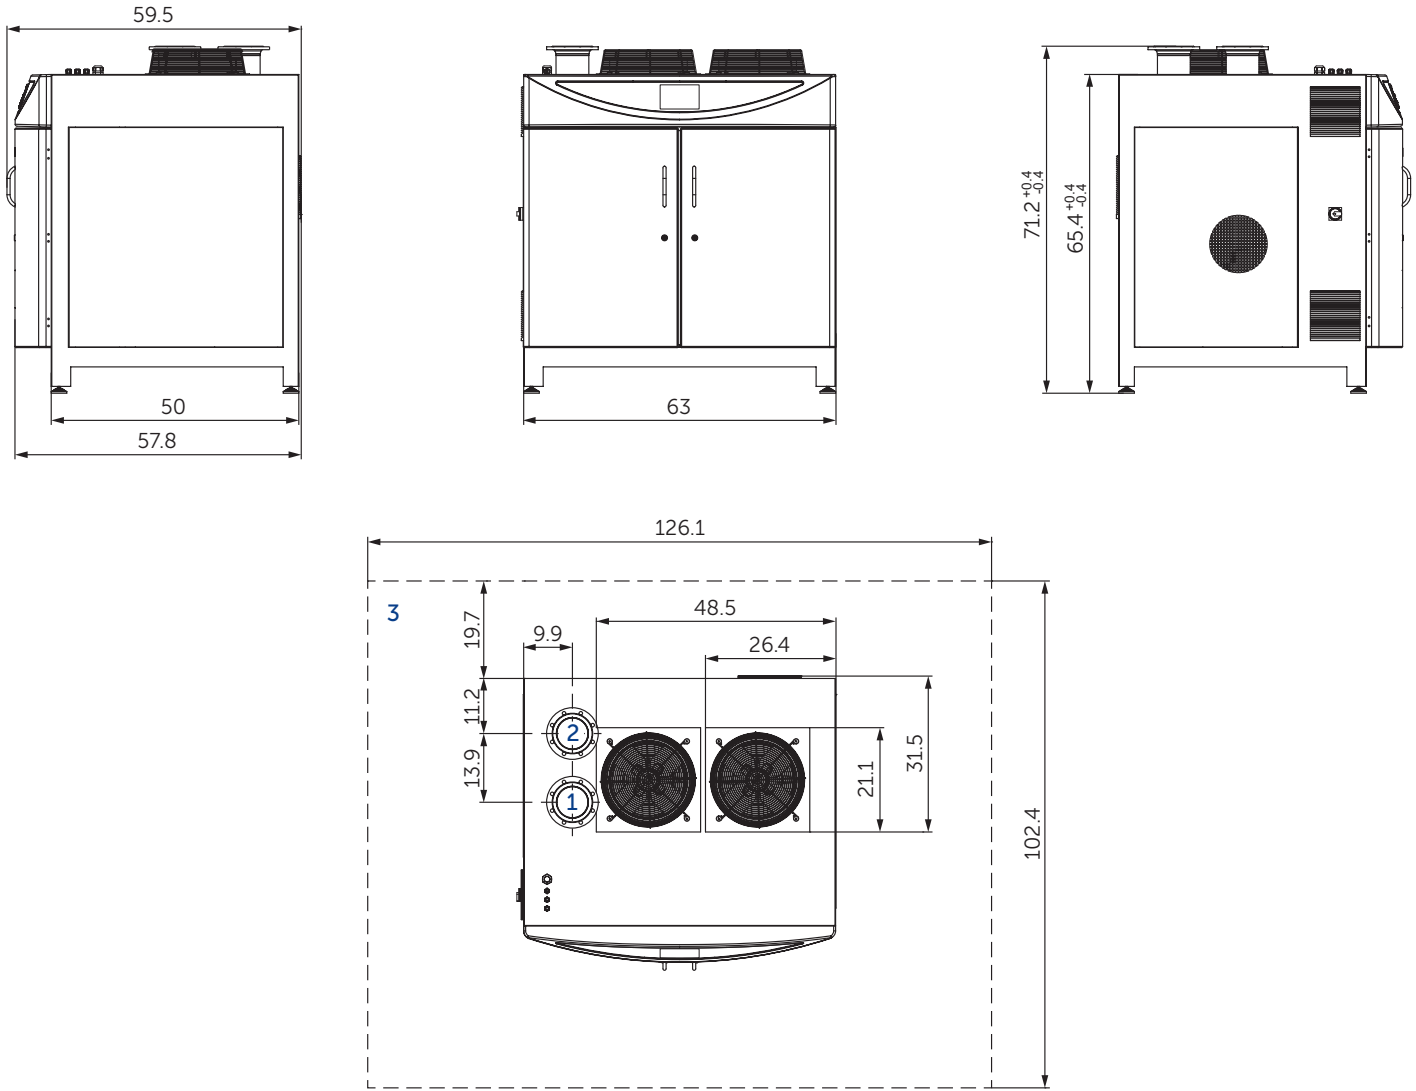

- 1 Vacuum connection (DIN 2565 - G6)
- 2 Pressure connection (DIN 2565 - G6)
- 3 Installation surface
- Dimensions inch

Suction air rate	Vacuum	Drive speed	Emission sound pressure level ¹⁾		Weight	 Frequency inverter VAU30/VADS1500+	 A
CFM max.	Torr	rpm max.	110 Hz	200 Hz	lbs	VAU30/VADS1500+	max.
811	150	12000 (110–200 Hz)	75	80	2646	40.2 hp • 380–480 V • 50/60 Hz	125

¹⁾ According to DIN EN ISO 11203, accuracy class of measurement: class 2, extended measurement uncertainty: 3 dB 39.4 inch distance, at medium load, both connection sides piped

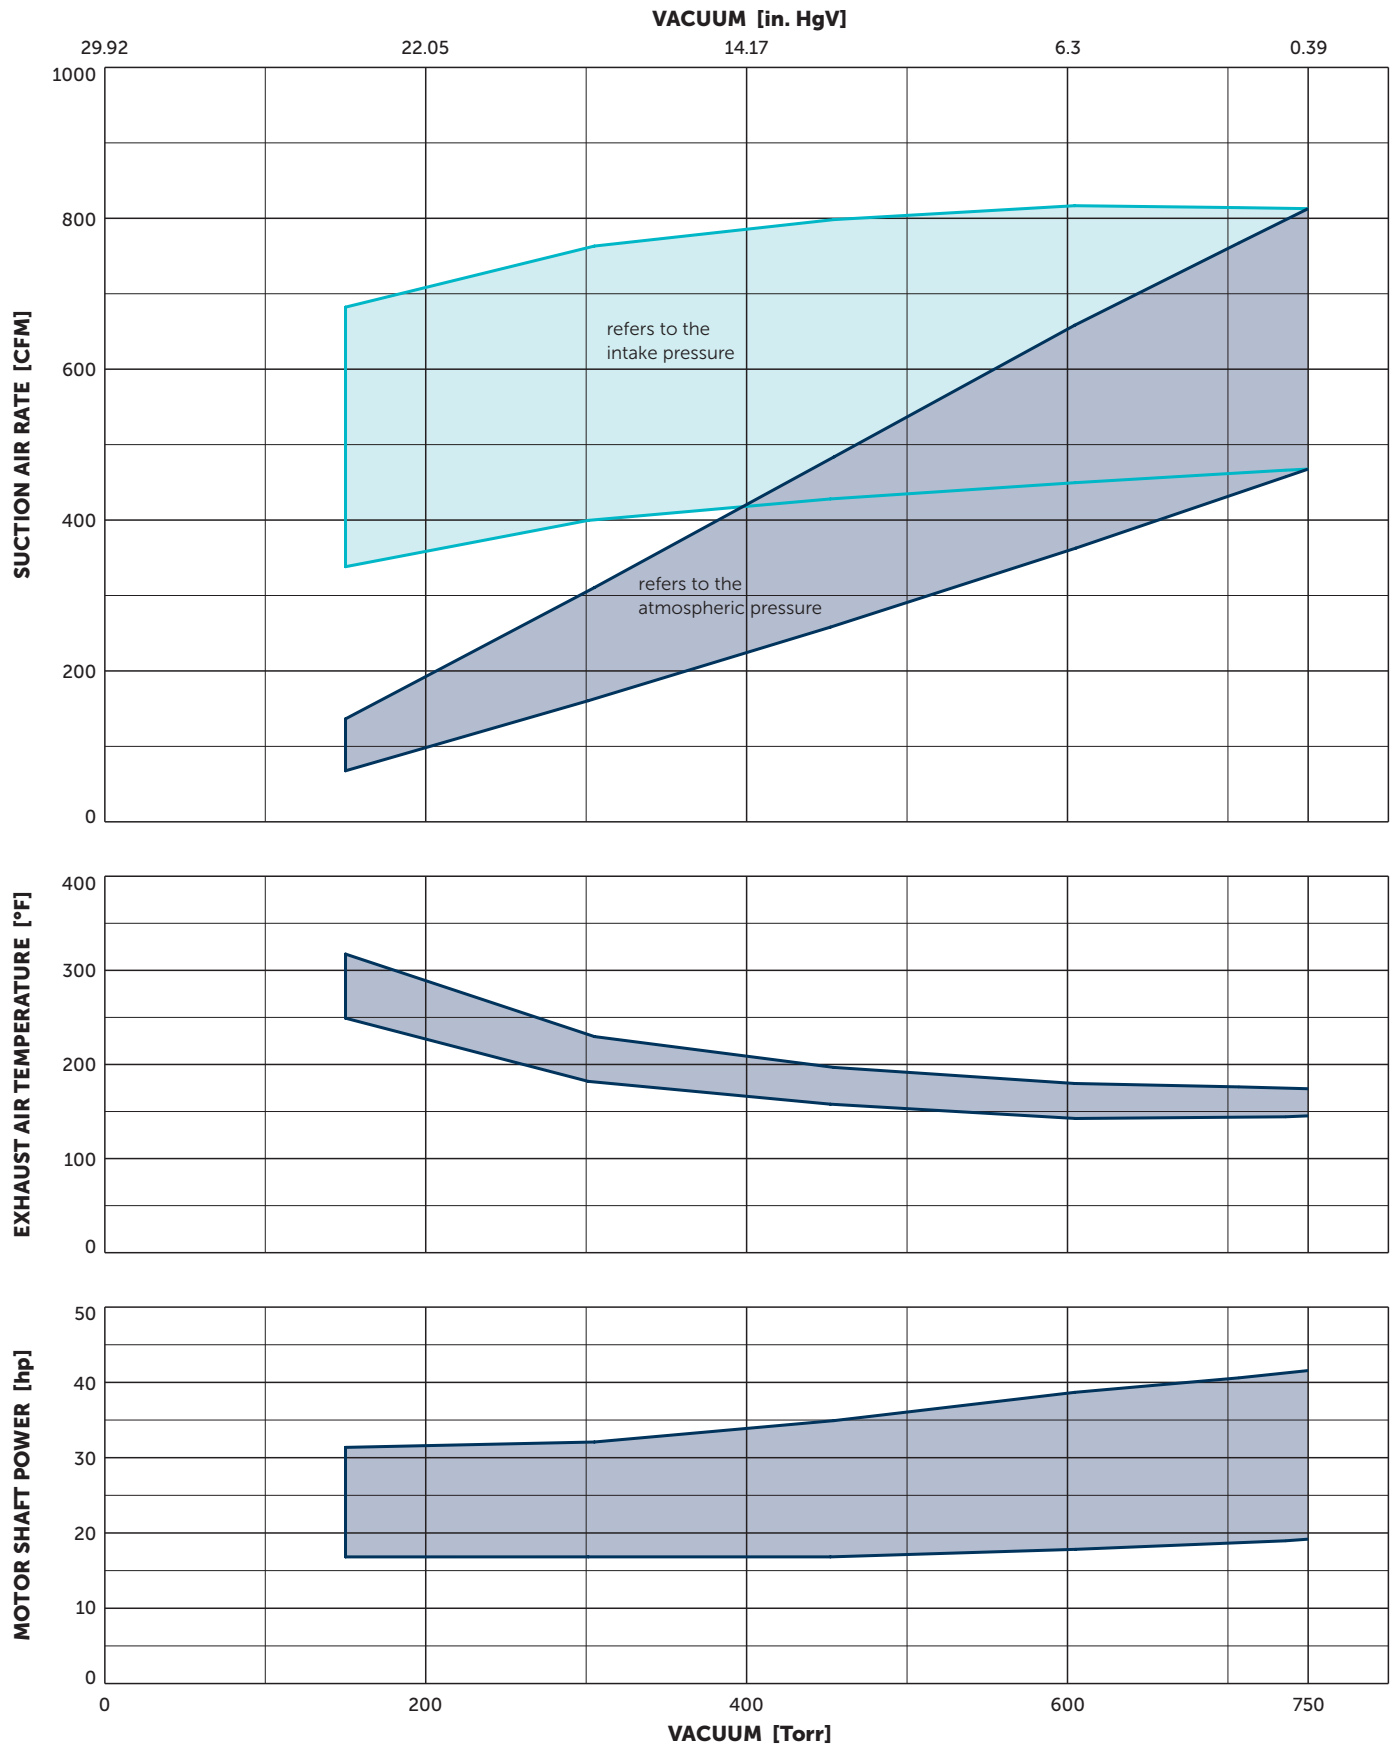

Reference data (atmosphere): 750 Torr, 68°F, measurements with integrated filter
 Tolerance: ±10%



MAKE IT BECKER.

