


DATA SHEET

MOTOR SPECIFICATIONS FOR KDT 3.60

MAKE IT BECKER.

MOTOR SPECIFICATIONS FOR KDT 3.60

- The M1 dimension can affect the total pump/blower length. (The motor illustration may vary.)
- Current consumption and rotation speed may vary. Tolerance in each case -1.5/+2%.
- For binding motor data, see motor type plate.
- For the operation of Becker pumps with standard motors on frequency inverters, our project planning notes must be observed! → [DOWNLOAD Project Planning Notes](#)

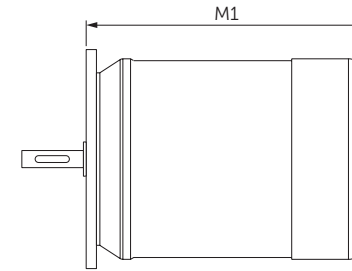

#	Specifications								Weight		M1		Does the motor affect the total pump/blower length?		Motor order no.	
	3~/1~	Hz	kW	[hp]	V	rpm	A	Version	kg	[lbs]	mm	[inch]	Affect?	Total length		
01	3~	50	2.2	[3.0]	Δ230/Y400	IE3	1440	8.2/4.8	IP55 • ISO F • PTO	24.5	[54.0]	307	[12.1]	yes	L1= 704 [27.7]	42289422300003RE
		60	2.6	[3.5]	Δ265/Y460	IE3	1735	8.2/4.8								
					Δ230/Y400		1705	9.0/5.2								
02	3~	50	2.2	[3.0]	Y400	IE3	1465	5.1	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42389407300114RE
		60	2.6	[3.5]	YY230/Y460	IE3	1765	9.3/4.6								
					YY208		1755	9.7								
03	3~	50	2.2	[3.0]	Δ200/Y350	IE3	1470	10.4/6.0	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42289453300114RE
		60	2.6	[3.5]	Δ220/Y380-400	IE3	1760	10.0/5.8–5.8								
					Δ200/Y350		1755	10.2/5.9								
04	3~	60	2.6	[3.5]	Δ400/Y690	IE3	1760	5.3/3.1	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42389454300114RE

#	Specifications								Weight		M1		Does the motor affect the total pump/blower length?		Motor order no.	
	3~/1~	Hz	kW	[hp]	V	rpm	A	Version	kg	[lbs]	mm	[inch]	Affect?	Total length		
05	3~	50	3.0	[4.0]	Δ230/Y400	IE3	1445	12.1/7.0	IP55 • ISO F • PTO	29.0	[64.0]	337	[13.3]	yes	L1= 734 [28.9]	42489422300003RE
		60	3.6	[4.8]	Δ265/Y460	IE3	1735	12.0/6.9								
					Δ230/Y400		1705	12.7/7.4								
06	3~	50	3.0	[4.0]	Δ230/Y400	IE3	1460	12.3/7.1	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42489422300114RE
		60	3.6	[4.8]	Δ265/Y460	IE3	1755	12.0/6.9								
					Δ230/Y400		1745	12.3/7.1								
07	3~	50	3.0	[4.0]	Y400	IE3	1460	7.0	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42589407300114RE
		60	3.6	[4.8]	YY230/Y460	IE3	1755	12.7/6.3								
					YY208		1735	13.5								
08	3~	50	3.0	[4.0]	YY200/Y400	IE3	1458	12.2/6.1	UL • CSA • CC IP55 • ISO F • PTO	41.2	[90.8]	361	[14.2]	yes	L1= 758 [29.9]	42589407300114TA
		60	3.6	[4.8]	YY230/Y460	IE3	1755	12.4/6.2								
					YY208	IE2	1744	13.2								
09	3~	50	3.0	[4.0]	Δ200/Y350		1465	14.2/8.2	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42489453300114RE
		60	3.6	[4.8]	Δ220/Y380-400	IE3	1755	13.5/7.8–7.5								
					Δ200/Y350		1745	13.8/8.0								
10	3~	60	3.6	[4.8]	Δ400/Y690	IE3	1760	7.6/4.4	UL • CSA • CC IP55 • ISO F • PTO	37.0	[81.6]	350	[13.8]	yes	L1= 747 [29.4]	42589454300114RE



MAKE IT BECKER.