

DATA SHEET

VATP 1600

RADIAL BLOWERS

air-cooled
frequency inverter

MAKE IT BECKER.

INTEGRATED FREQUENCY INVERTER

with a wide control range up to a maximum of 400 Hz for exact adaptation to customer demands

LARGE VOLUME FLOW

with a compact design

INTAKE FILTER


with large filter surface

SOUND-INSULATED CABINET



VARIAIR
TURBO PACKAGE


 **BECKER**

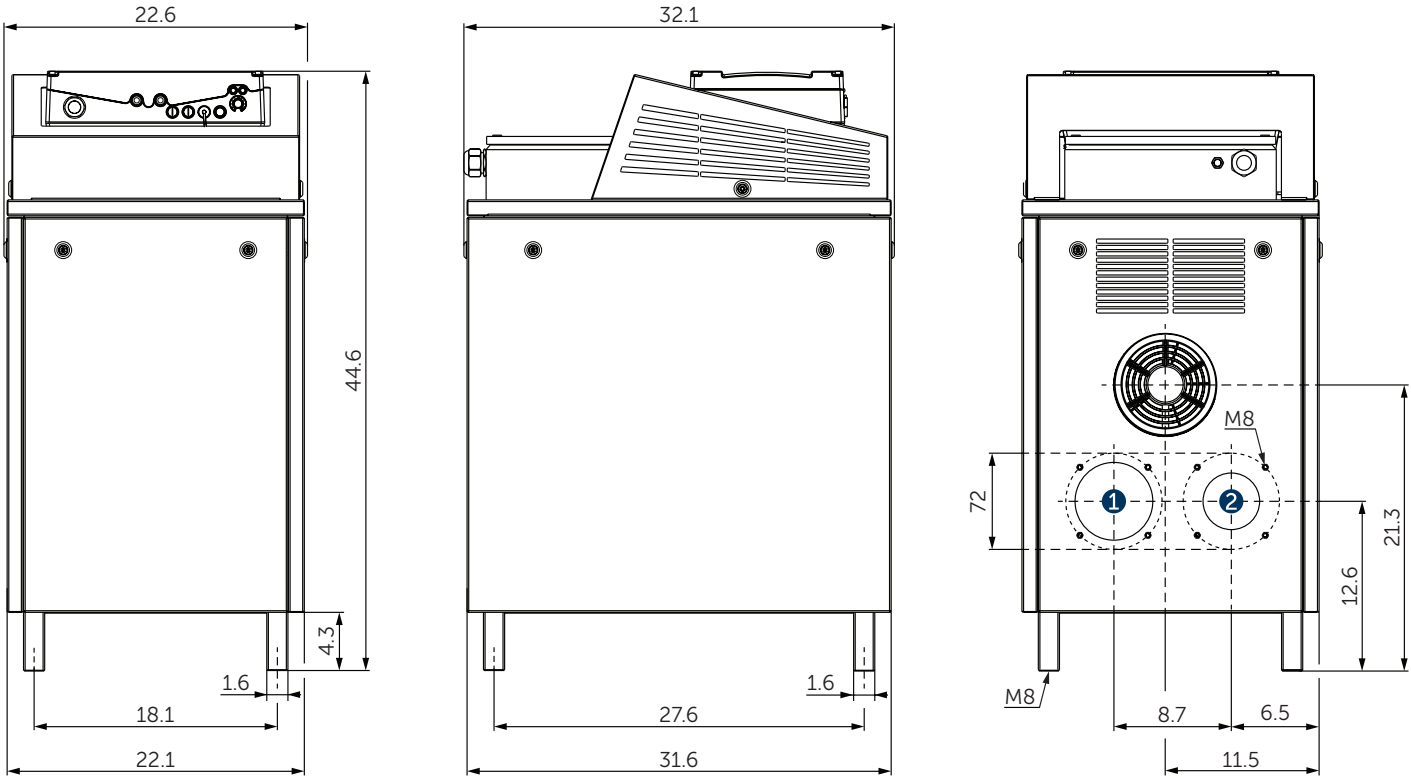

- 1 Vacuum connection
- 2 Pressure connection
- Dimensions in inch

Blast air rate	Pressure		Frequency	Emission sound pressure level ¹⁾	Weight	
CFM max.	in. H ₂ O max.	PSIG max.	Hz	dB(A) @ 80.4 in. H ₂ O (360 Hz)	lbs	Frequency inverter
923	164.9	5.9	≤400	65	357.2	400–480 V ±10% 50/60 Hz

¹⁾ DIN EN ISO 3744 (KpA = 3 dB(A)) interval of 39.4 inch, at medium load, both connection sides piped

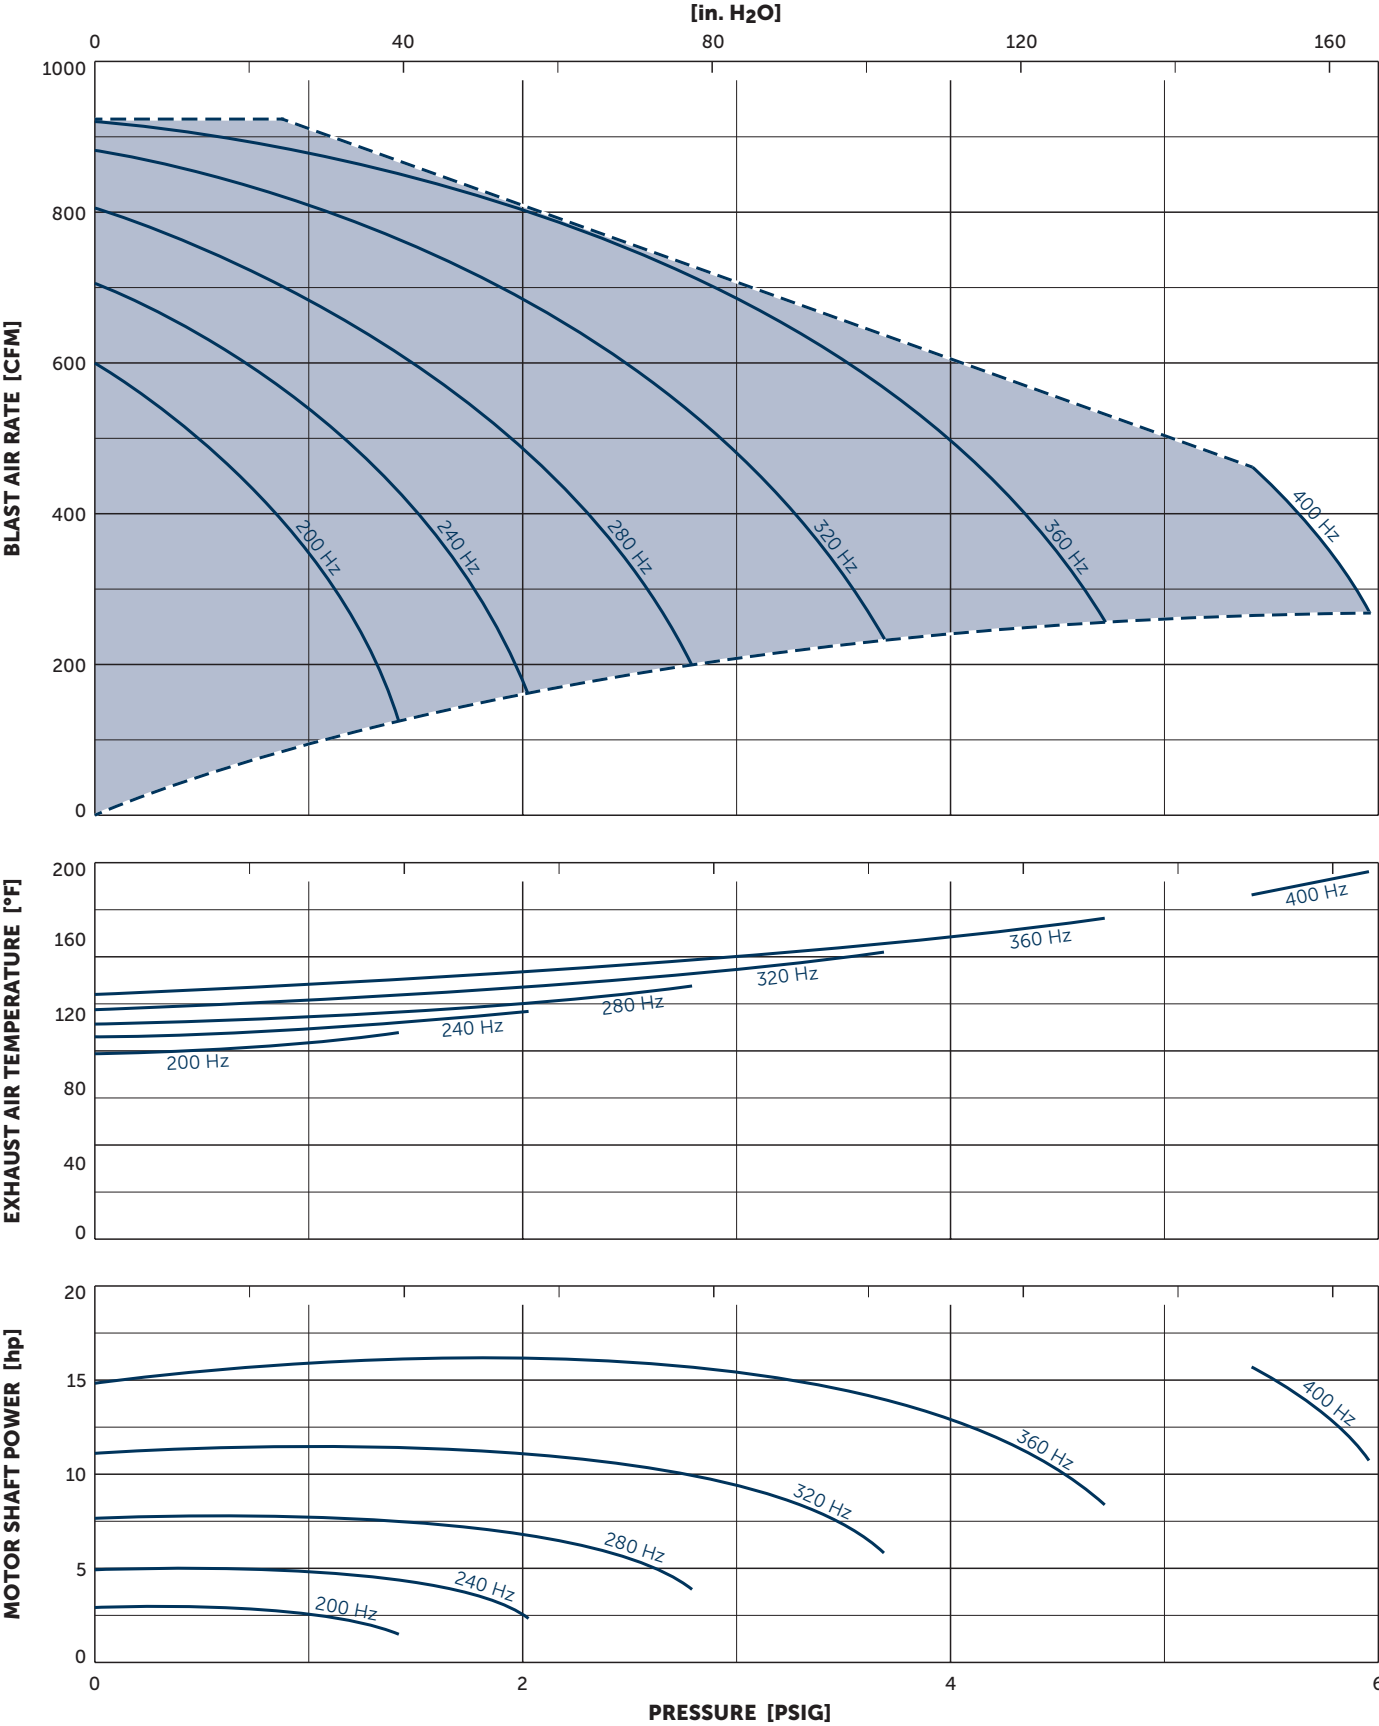

Reference data (atmosphere): 0 in. HgV, 68°F
Tolerance: ±5%

VARIANTS AND ACCESSORIES

- **Non-return flap** for suction side and/or pressure side
- **Silencers** for suction side and/or pressure side
- **Hose connector** for suction side and/or pressure side, gasket and 4 screws included in each case
 - **RV2.19-0-110.12** (51660252500) for 110 mm [4.33 inch] hose
 - **RV2.19-0-110.10** (51660152500) for 150 mm [5.91 inch] hose



Suction and pressure connection prepared for optional hose connectors RV2.19-0-110.xx



Optional silencers

MAKE IT BECKER.

HOMEPAGE
RV/VATP SERIES



ONLINE SHOP
VATP 1600



www.beckerpumps.com
www.becker-international.com

