

DT25D—DT250D/DT25X—DT250X

DUPLEX DRY ROTARY VANE INDUSTRIAL VACUUM SYS-

MAKE IT BECKER.

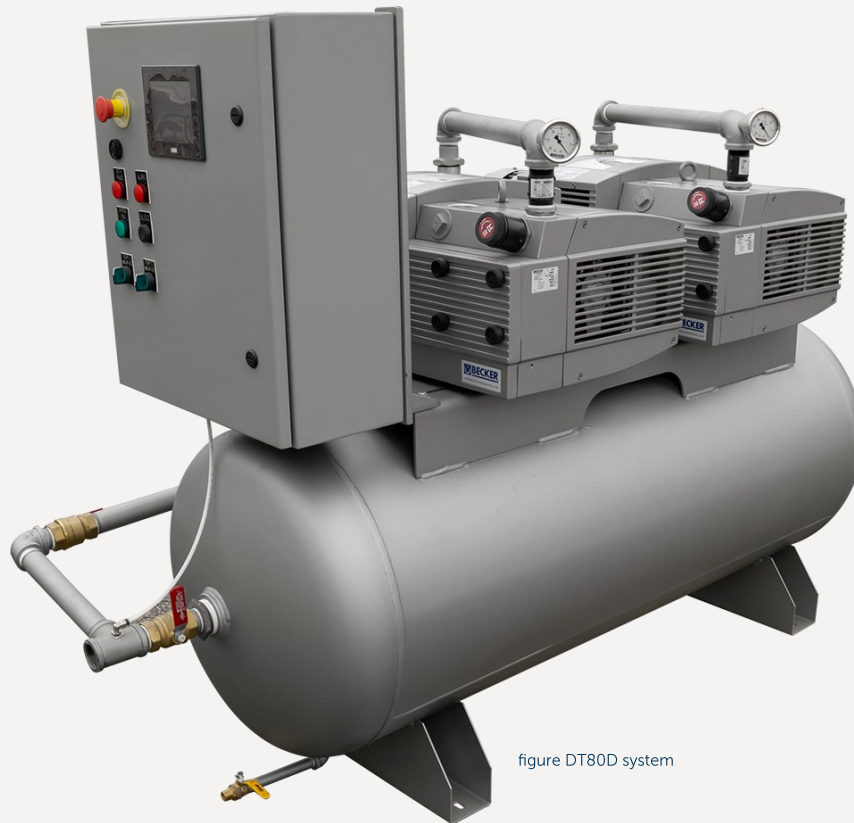


figure DT80D system

MODEL	HP	END VACUUM ("Hg)	OPEN FLOW (SCFM)	FLOW @ 19"HG (SCFM)	BTU/HR (19"Hg)	BTU/HR (MAX VAC)	FLA (Per Pump)			SOUND ¹ dB(A)
							208	230	460	
DT25D/X	1.2	25.5	35.3	8.4	5,500	5,100	3.7	3.6	1.8	67
DT40D/X	2	25.5	56.5	13.6	10,000	9,600	6.5	5.8	2.9	72
DT60D/X	3.5	27	77.7	22.5	13,300	12,600	10.6	10.1	5.1	73
DT80D/X	3.5	27	92.4	25.8	16,700	15,700	9.7	9.3	4.6	75
DT100D/X	4.8	27	137.7	37.3	22,900	23,200	13.2	12.4	6.2	77
DT140D/X	6	24	181.3	50.9	34,800	34,100	18.7	18.4	9.2	79
DT250D/X	8.9	24	335.3	101.8	44,400	45,900	28.1	27.8	13.9	79
	12	27					35.4	33.4	16.7	

(1) Per Pump dB(A) – According to DIN EN ISO 3744 (KpA = 3db(A)), 39.4 inch distance, at medium load, both connection sides piped

(2) All values listed are at 60Hz

(3) Reference data (atmosphere) 0"HgV, 68°F; Tolerance: ±5%



THE BECKER ADVANTAGE SYSTEM

FEATURES OF THE DUPLEX DRY ROTARY VANE

Industrial Vacuum System

BECKER ADVANTAGE D & X SIMPLEX TANK MOUNT VACUUM SYSTEM

Pneumatic vacuum system designed for industrial use. Features two Becker brand vacuum pumps, with integrated filtration and safety relief valves. Pumps and control panel mounted to air receiver for convenient installation. All systems are tested for leaks and functionality before shipping.

The Advantage D & X duplex systems include:

- Two Becker dry rotary vane vacuum pumps
- AMSE coded vacuum receiver with drain and bypass manifold
- Single point service for electrical and vacuum connections
- Integrated electrical panel with duplex pump controls
- Optional external filtration canisters (one per pump)

VACUUM PUMPS

All pumps used on our systems are Becker Manufactured and individually tested at factory before shipping. Becker oil-free rotary vane vacuum pumps use a carbon/resin composite material unique to Becker. Our Advantage X systems feature our long lasting vane design for an extended vane life of 20,000 hours. Additional specifications are:

- End vacuum of 25"Hg-27"Hg (Model Dependent)
- Integrated 2-micron paper inlet filter
- Carbon dust separator and vacuum safety relief valves
- Liquid filled vacuum gauges installed at the pump
- Quick and simple maintenance procedures
- DT25-DT40 – Direct drive integrated motor
- DT60-DT250 – Single shaft direct drive through coupling
- IE3/NEMA PREMIUM efficiency motors
- TEFC Motors
- 208V/230V/460V/575V – 3-phase motor options

PLUMBING & RECEIVER

All vacuum pumps are plumbed to a manifold and connected to the air receiver. Check valves are installed at each pump inlet to prevent backflow in the system. Ball valves installed for pump and receiver isolation. One point connection for vacuum plumbing is standard for all Becker systems. Optional manifold and one point connection for exhaust plumbing is available.

All air receivers are ASME stamped to code and may have a mounted bypass and drain to allow for manual liquid removal.

CONTROL PANEL

NEMA type 3R, 4 & 12 enclosure with UL listing; mounted and prewired for duplex system controls. Becker duplex system controls are designed with lead/lag sequencing to maintain the desired vacuum range and provide automatic alternation of vacuum pumps to maintain equal run time between available pumps. Each system has adjustable minimum and maximum run timers to facilitate the correct activation of pumps in the system. Additional elements included are:

- 115V low voltage control transformer with fused primary and secondary
- Motor starters with overload protection
- Automatic low voltage transformer switching with alarm
- One Hand-Off-Auto switch per pump
- System run & alarm lamps
- Sound horn for notification of system alarms
- Silence/acknowledge alarm push button
- CVT failure lamp alert
- Isolated relays for remote alarm installation
- Preinstalled vacuum transducer

Panel also includes a 7" touchscreen LCD HMI unit to display system status. HMI provides access to basic system setup settings such as number of active pumps, vacuum high/low setpoints, and min/max run time. Live monitoring of each pump motor's average amperage and amperage per phase is also available.




PLC control unit offers the following communication services:

- Ethernet/IP slave device
- Modbus TCP
- SMS/email notifications
- Web server (WebVisu)

DIMENSIONS—VERTICAL SYSTEM

MODEL	LENGTH (Inches)	WIDTH (Inches)	HEIGHT (Inches)	RECEIVER CAPACITY (Gallons)	INLET (NPT)	EXHAUST (NPT)	WEIGHT (Pounds)
DT25D/X	42	27	70	60	2	0.75	500
DT40D/X	42	28	70	60	2	0.75	780
DT60D/X	52	35	76	120	2	1	1,350
DT80D/X	52	36	76	120	2	1	1,450

Dimensions subject to change.
Minimum clearance around system is 36 inches.
Contact factory for dimensional drawings.

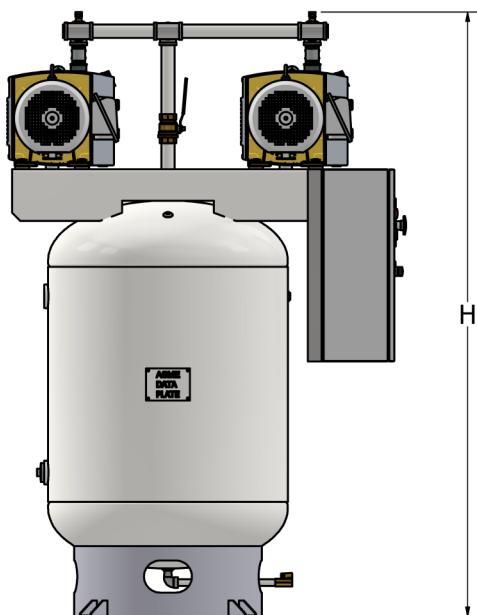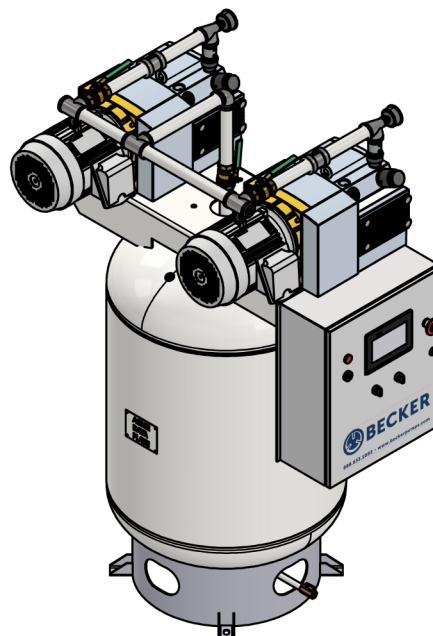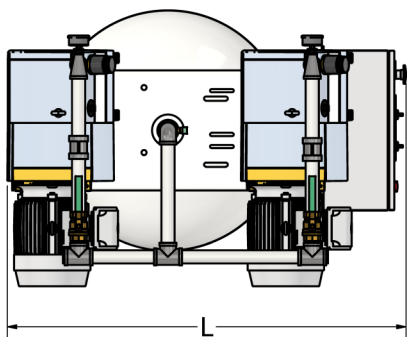

DIMENSIONS—HORIZONTAL SYSTEM

MODEL	LENGTH (Inches)	WIDTH (Inches)	HEIGHT (Inches)	RECEIVER CAPACITY (Gallons)	INLET (NPT)	EXHAUST (NPT)	WEIGHT (Pounds)
DT25D/X	55	26	50	60	2	0.75	500
DT40D/X	55	28	50	60	2	0.75	780
DT60D/X	72	32	54	120	2	1	1,350
DT80D/X	72	32	54	120	2	1	1,450
DT100D/X	72	36	54	120	2	1.5	1,445
DT140D/X	73	36	54	120	2	1.5	1,565
DT250D/X	90	48	62	240	2	2	3,100

Dimensions subject to change.
Minimum clearance around system is 36 inches.
Contact factory for dimensional drawings.

